

ATTENTION: TRACK PAD SALES
 Superior Tire & Rubber Corp.
 40 Scientific Road
 Warren, PA 16365
 Tel: 800-289-1456 x 122
 Fax: 814-726-0740
 E-mail: trackpads@superiortire.com
WWW.TRACK-PADS.COM



ENGINEERING REVOLUTION™

CUSHOTRAC® MAXXimum™ Track Pad Request Form

Machine Mfg _____ Model # _____

Application _____ OEM Grouser Shoe Part # _____

Number of pads _____ Master Shoe (circle one): Yes / No **If Master pad is needed a separate worksheet is required*

Side to side dimension (size) of MaXXimum™ Pad requested (check one): 16" _____ 18" _____ 20" _____ 24" _____

Grouser Shoe or Chain Dimensions: (Be precise – the pads are drilled to your specifications and ARE NON-RETURNABLE*)

A: Front Bolt Hole Spread _____

B: Rear Bolt Hole Spread _____

C: Front to Rear Bolt Hole Spread _____



D: Bolt Hole Diameter _____

E: Pitch _____

F: Link Width _____

G: Bolt Size Used _____

H: Body clearance _____

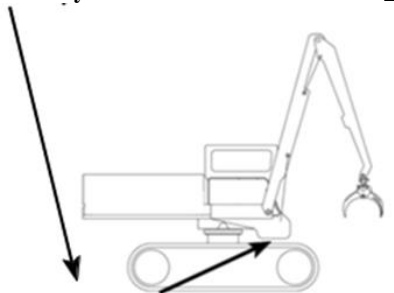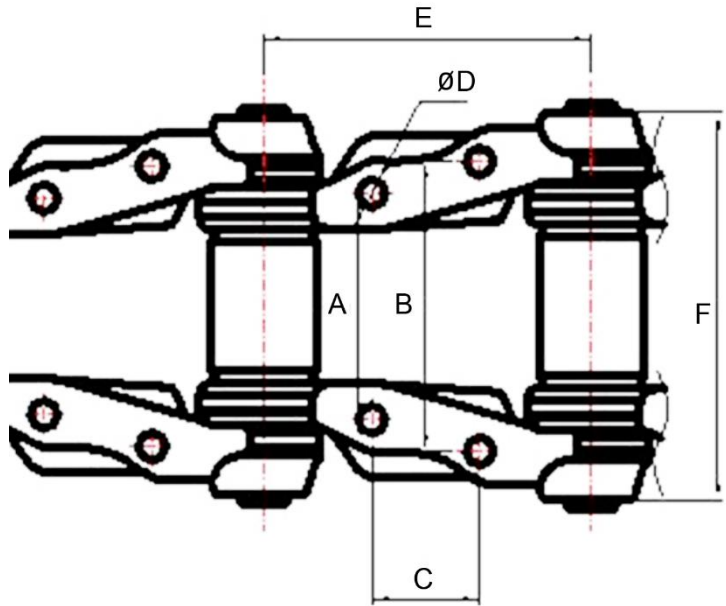

Maximum clearance between the top of the steel shoe and the body/attachment of the machine

H : _____

SIGNATURE APPROVING THE BOLT PATTERN IS REQUIRED BEFORE PLACING YOUR ORDER: _____

Name: _____ Tel: _____ Fax: _____

Company Name: _____ E-mail: _____

Address: _____

*****CANCELTATION POLICY: IMPORTANT PLEASE READ*****

The MaXXimum™ Pads are a custom drilled pad based on dimensions provided by the customer – these are NON-RETURNABLE. IT IS HIGHLY RECOMMENDED THAT AN ENGINEERING DRAWING IS FURNISHED TO DETERMINE CORRECT HOLE PLACEMENT.