STR Caster™ Specification Guide for Stabilizer & Rigid Casters

Make & Model Cross Reference OEM Part Number Cross Reference Caster Specification Cross Reference Caster Kit Replacement Parts Diagram Features & Benefits of

STR 1000, 2000, 5200, 5400, & 4100 Series

Maintenance Log



1.800.289.1456 1.814.723.2370 fax 1.814.726.0740 www.SuperiorTire.com



ENGINEERING REVOLUTION[™]

STR Stabilizer Caster™ to Make/Model Cross Reference

| | | |)_(| | \rightarrow \rightarrow \rightarrow \rightarrow |
|-----------------|-------------|----------------------|----------------------|----------------|---|
| STR1500 | Hyster | Yale | | | |
| | W40Z | MPB040 | | | |
| | W50Z | MPW045 | | | |
| | W45Z | | | | |
| STR1600 Series | Raymond | | | | |
| | 8210 | | | | |
| | 8310 | 0.17 | • | | D · |
| STR2000 | Baker | CAT | Crown | Hyster | Prime Mover |
| | BWR EWR | NPV series WR8000 | PE 40-80 PC 3000 | W40XT W40CL | SN20-40 SR 30 |
| | EVVK | VIROUUU | PC 3000 PC 40-80 | WR series | PE 60W |
| | | | PC 40-80 PW 40-80 | B40CL | JT 60C |
| | Toyota | Yale | WPT | W40-60XL | PX 40 |
| | HB20 | MPE060 | PTE | B40XL | MX 50 |
| | 6HBE30 | MPE080 | PTC | W/B/C 40-60 | RX 50-65 |
| | ONDEOU | 1111 2000 | PE3000 | BL/BF | PE 40-65 |
| | | | PE4000 | | DLR65 |
| STR2000BL | Linde/Baker | | | | |
| | EWR80 | | | | |
| | EWR60 | | | | |
| | R20 | | | | |
| | EWR2692 | | | | |
| STR2000CR2 | Crown | | | | |
| | PE4000-6000 | | | | |
| STR2000HY | Hyster | Yale | | | |
| | B80Z,B60Z | MPE060LE/LF,VG | | | |
| | R30CH | MPE080LE/LF,VG | | | |
| STR2000JH | CAT | Jungheinrich | | | |
| | WR6000 | ECR327 | | | |
| STR2000RA | Raymond | ECR336 Raymond | Toyota | | |
| STRZUUURA | 114 | 8400 | 8HBE30 | | |
| | 810 | 8500 | 01DE30 | | |
| | 19-F60L | 8600 | | | |
| STR2000TY | CAT | 0000 | | | |
| 0111200011 | NPV60 | | | | |
| STR3000 | Barrett | Hyster | Yale | | |
| | WRP 60-80 | W60-80XT | MLW/E | | |
| | | B40-80XT | MP/W/E/C | | |
| | | C60-80XT | MP040-060 | | |
| STR4000 | Clark | Crown | | | |
| | HWD, SSX | 60PE | | | |
| STR4100 Series | Unicarriers | | | | |
| | SPX Series | | N/ 1 | | |
| STR5200 Series | Crown | Hyster | Yale | Unicarriers | |
| | PE4000 | B60Z | MPE060LE/LF,VG | RPX Series | |
| | PE4500 | B60ZAC | MPE080LE/LF,VG | | |
| | | B60ZHD | | | |
| STR5400 Series | Clark | B80Z Crown | | | |
| STR 3400 Series | HWX30 | PR4500 | | | |
| | HWX40 | F 114000 | | | |
| | 1100/40 | | | | |

STR Stabilizer Caster™ to OEM Part Number Cross Reference


| STR1500 Series | Hyster 2044852 | | | | | |
|----------------|-------------------|--------------|----------------------------|----------------|-------------|----------------|
| STR1600 Series | Raymond | Yale | | | | |
| | 1241883 | 580023164 | | | | |
| STR2000 | Baker | CAT | Crown | Hyster | Prime Mover | Raymond |
| | 127520 | 1009237 | 843611 | 2007884 | 139312 | 671-017 |
| | 138071 | 1009299 | 843613 | 3246410 | 27332 | 671-023 |
| | 138073 | 1202032 | 843614 | 323772 | 27675 | 671-024 |
| | 138075 | | 843616 | 346202 | 27849 | 671-025 |
| | 139312 | Crown | 84361001 | 351314 | | 671-026 |
| | 993465 | 76546 | 84361003 | 526120 | Mitsubishi | |
| | 993994 | 310273 | 84361006 | 826275 | NA067022 | Toyota |
| | 152865 | 81270 | 82694001 | 020210 | NV COT OLL | 00590-00027-71 |
| | 153858 | 826941 | 82694002 | Larcaster | RVI | 42660-81100-71 |
| | 100000 | 826942 | 82694002 | LC2000/2500 | 0951-C01 | 42000-01100-71 |
| | | 826943 | 82694003 | LC2000/2500 | 0951-001 | Yale |
| | | | 02034004 | | | |
| | | 826944 | | | | 1501200-33 |
| | Linds (Dalass | 826946 | | | | |
| STR2000BL | Linde/Baker | | | | | |
| | 154148 | | | | | |
| STR2000CR2 | Crown | Larcaster | | | | |
| | 129929-001 | LC2400 | | | | |
| | 133109-001 | | | | | |
| STR2000HY | Hyster | Yale | | | | |
| | 346201 | 524244220 | | | | |
| | 2079240 | 524267533 | | | | |
| STR2000JH | Jungheinrich | Jungheinrich | | | | |
| | W205012772 | S0440054 | | | | |
| STR2000RA | Raymond | Raymond | | | | |
| | 59043168 | 59048553 | | | | |
| | 1082408 | 671-042 | | | | |
| STR2000TY | CAT | | | | | |
| 0111200011 | NA014895 | | | | | |
| | 217384 | | | | | |
| STR3000 | Barrett | Hyster | Larcaster | Toyota | Yale | Yale |
| 01113000 | 43380-FS1000/1/2 | 2308415 | LC3001-350 | 00590-01556-71 | 516012603 | 720465006 |
| | 100001010000,172 | 2311685 | 200001 000 | 00590-01662-71 | 518782600 | 524153612 |
| | | 2011000 | | 00590-39633-71 | 520583002 | 524155012 |
| STR4000 | Clark | Clark | | 00590-39633-71 | Crown | Larcaster |
| 51K4000 | 1779711 | 2789890 | | | | |
| | 2314632 | 2779621 | | | 76546 | LC4001/4501 |
| | | | | | | |
| | 2314636 | 2786022 | | | | |
| | 2743452 | Decouver | | | | |
| STR4100 Series | Crown | Raymond | Unicarriers | | | |
| | 310260 | 2832879 | 43380-FS400 43380-FS401 | | | |
| STR5200 Series | Crown | Hyster | Yale | Unicarriers | | |
| | 129929-001 | 316201 | 524244220 | 43380-FS005 | | |
| | 133109-001 | 2072940 | 524267533 | | | |
| STR5400 Series | Clark | Crown | 021201000 | | | |
| UTRU400 Jenes | 2832879 | 310265 | | | | |
| | 2002010 | 010200 | | | | |

STR Stabilizer Caster™ Kit Selection Diagram

NOTE:

This model is based off of the STR2000 Stabilizer Caster. Patented design & components. US Patent #6,425,161 B1 for the industrial caster wheel & PolyBlock™ shock absorbing mechanism, & US Patent #7,093,319 B2 for the adjustment member of the caster.

*Adjustment Set Screw and Adjustment Jam Nut are included in the Complete Bolt Kit and the Housing Kit.

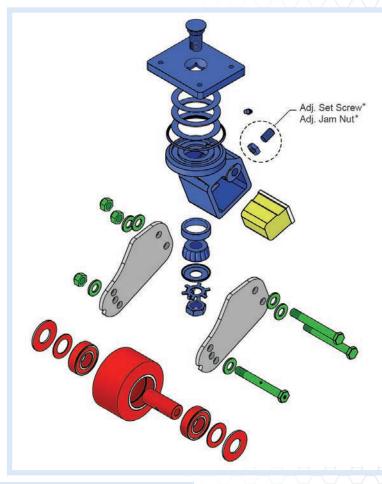

Complete Bolt Kit

| Included Parts | Quantity | |
|----------------|----------|--|
| Bolt | 2 | |
| Greasable Axle | 1 | |
| Washers | 6 | |
| Nylock Nut | 3 | |
| Adj. Set Screw | 1 | |
| Adj. Jam Nut | 1 | |


Housing Kit


| Included Parts | Quantity |
|---------------------------------------|----------|
| Mount Plate | 1 |
| King pin, washer, nut | 1 |
| Upper Olite Bearings | 1 |
| Caster Housing & Zerk | 1 |
| Adj. Set Screw | 1 |
| Adj. Jam Nut | 1 |
| Lower Timken Cup & Cone Bearing parts | 1 |

Wheel Kit

| Included Parts | Quantity |
|----------------|----------|
| Load Wheel | 1 |
| Axle Bushing | 1 |
| Bearings | 2 |
| Washers | 2 |
| String Guards | 2 |

STR Stabilizer Caster™ Dimensions







| Model | Series | Assembled Height (in) | Turning Radius (in) | Centered or Offset Swivel | Load Wheel Size(in) | Base Plate Size(in) | Slots or Holes | Bolt Pattern |
|-------------|----------|--------------------------|------------------------|------------------------------|------------------------|------------------------|-------------------|------------------------------------|
| STR1500 | STR1000 | 5.5 | 3.3125 | Offset | 3.25 x 1.57 | 3.15 x 4.587 | Threaded Holes | 3 Hole |
| STR1638 | STR1000 | 5.5 | 3.3125 | Centered | 3.25 x 2 | 3.5 x 3.5 | Holes | 2.5 x 2.5 |
| STR2000 | STR2000 | 7.5 | 4.1875 | Centered | 4 x 2.5 | 4 x 4.75 | Slots | 3.992 x 3.004 |
| STR2000BL | STR2000 | 7.5 | 3.875 | Centered | 4 x 2.5 | 3 x 4.75 | Holes | 2.756 x 3.385 |
| STR2000CR2 | STR2000 | 7.5 | 4.1875 | Centered | 4 x 2.5 | 5 x 5 | 2-Sets of Holes | 2.625 x 3.625 and 4.125 x 4.125 |
| STR2000HY | STR2000 | 7.5 | 4.1875 | Centered | 4 x 2.5 | 4 x 4.5 | Threaded Holes | 2.795 x 3.295 |
| STR2000JH | STR2000 | 7.875 | 3.625 | Offset | 4 x 2.5 | 4.25 x 5.5 | Threaded Holes | 3.125 x 4.125 |
| STR2000RA | STR2000 | 7.5 | 4.1875 | Offset | 4 x 2.5 | 5 x 6 | Holes | 3 x 5 |
| STR2000TY | STR2000 | 7.5 | 4.1875 | Centered | 4 x 2.5 | 4 x 5.75 | Holes | 3 x 5 |
| STR2100 | STR2100 | 8.375 | 4.1875 | Centered | 4 x 2.5 | 4 x 4.5 | Threaded Holes | 2.795 x 3.295 |
| STR3000 | STR3000 | 9.125 | 4.1875 | Centered | 4 x 2.5 | 5 x 7 | Slots | 3 x 5 |
| STR3002 | STR3000 | 9.125 | 4.1875 | Centered | 5 x 2.5 | 5 x 7 | Slots | 3.328 x 5.269 |
| STR5213 | STR5200 | 8.07 | 4.125 | Centered | 4 x 2.5 | 4 x 4.5 | Holes | 2.795 x 3.295 |
| STR5253 | STR5200 | 7.75 | 4.5 | Centered | 4 x 2.5 | 5 x 5 | 2-Sets of Holes | 2.625 x 3.625 and 4.125 x 4.125 |
| STR5263 | STR5200 | 8.85 | 4.442 | Centered | 4 x 2.5 | 5 x 7 | Holes | 3.375 x 5.25 |
| STR5453 | STR5400 | 7.51 | 4.125 | Centered | 4 x 2.5 | 5.25 x 5.25 | 2-Sets of Holes | 2.625 x 3.625 and 4.125 x 4.125 |
| STR5473 | STR5400 | 8.189 | 3.793 | Centered | 4 x 2.5 | 5.25 x 5.25 | Holes | 4 x 4 |
| Rigid Swive | I Caster | | | | | | | |
| STR4163 | STR4100 | 8 | 4.684 | Centered | 6 x 3 | 4.5 x 6.25 | Holes | 3.375 x 5.25 |

STR Stabilizer Caster The Newest Technology in Stabilizer Casters

STR1000 Series Caster For 4,500lb Pallet Trucks

Engineered for walk-behind pallets trucks carrying 4,000-5,000lb loads. Designed with a full size swivel mechanism for added strength and longer wear-life. Features a PolyBlock™ dampener for consistent performance throughout the life of the caster.



Full Size Swivel

Using cup and cone with thrust bearing instead of single row ball bearing ensures high durability and longer wear-life.

Fine & Convenient Height

Extra-fine adjustments eliminating the use of spacers and shims

Durable Duty Steel Construction

0.25" steel plates with no welds to reduce weak points

Greater Cornering Stability & Comfort

Patented PolyBlock[™] damper technology reduces oscillation and rocking effect

Standard Features

- Rust Proof Zinc Plating
- Greasable Wheel Axle
- Available for: STR1500, STR1638

Extreme Food Service

- In addition to standard features
- Greasable Pilot Axle
- · Larger Greasable Wheel Axle
- Available for STR1500
 caster models

♦ String Guard comes standard

- Linear Deflection with a positive stop after 1"
- Interchangeable kit replacements available for all models
- Optional maintenance free, Sealed Wheel Bearings
- ◊ Optional Wheel compounds:
 - Cushothane[®] EZ[™]
 - Cushothane[®] XL[™]

Immediate Availability

Designed and manufactured in-house, we stock and service all assemblies and replacement parts

Reliable and Consistent Performance Less height and performance deterioration over time than metal springs



STR Stabilizer Caster[™] The Newest Technology in Stabilizer Casters

STR2000 Series Caster For 6,000lb Rider Pallet Trucks

Engineered as a drop-in replacement for all OEMs, the STR Stabilizer Caster[™] - with patented PolyBlock[™] technology - eliminates the use of unreliable metal springs yet provides greater stability in cornering, a smoother ride and higher productivity.

Durable Steel Construction

Adiustments

spacers and shims

environments

Fine & Convenient Height

Easy three-position coarse & extra-fine adjustments eliminating the use of

Longer Wheel Work-Life and Protected in All Environments

By using a larger wheel (4" O.D.) with the

greasable wheel or axle for corrosive

toughest polyurethane compound available with Rust-Proof Zinc plated parts and a

Greater Cornering Stability

Patented PolyBlock[™] damper technology

reduces oscillation and rocking effect



Designed and manufactured in-house, we stock and service all assemblies and replacement parts

Reliable and Consistent Performance Less height and performance deterioration over time than metal springs

Standard Features

- Rust Proof Zinc Plating
- Greasable Wheel Axle
- Available for: STR2000. STR2000BL, STR2000CR2, STR2000HY, STR2000JH, STR2000RA and STR2000TY

Extreme Food Service

- Greasable Pilot Axle
- Larger Greasable Wheel Axle
- Available for STR2000HY. STR2000JH, and STR2000TY caster models

♦ String Guard comes standard

- ◊ Linear Deflection with a positive stop after 1.5"
- ◊ Interchangeable kit replacements available for all models
- ◊ Optional maintenance free, Sealed Bearings
- ◊ Optional Wheel compounds:
 - Cushothane[®] EZ[™]
 - Cushothane[®] XL[™]

STR Stabilizer Caster[™] The Newest Technology in Stabilizer Casters

STR5200 Series Caster Side Adjustable for 6,000lb Rider Pallet Truck

Designed to be quickly and easily adjustable from the side of the truck, without ever having to lift the truck. Solid casting with no welds and thicker 5/16" side plates for added strength and longevity. Also features patented PolyBlock[™] dampener technology.



Immediate Availability Designed and manufactured in-house, we stock and service all assemblies and replacement parts

Reliable and Consistent Performance Less height and performance deterioration over time than metal springs

Heavy Duty Steel Construction Solid casting without welds and heavy duty

5/16" side plates

Adjustable Caster Available

Achieve the perfect height using a typical wrench with our linear fine thread adjusting mechanism - without lifting the truck

Longer Wheel Work-Life and Protected in All Environments

By using a larger wheel (4" O.D.) with the toughest pólyurethane compound available with Rust-Proof Zinc plated parts and a greasable wheel or axle for corrosive environments

Patented PolyBlock[™] damper technology reduces oscillation and rocking effect



Standard Features

- Rust Proof Zinc Plating
- Greasable Wheel Axle
- Available for: STR5213, STR5253, STR5263, STR5200B
- ◊ String Guard comes standard
- Linear Deflection with a
 positive stop after 2 inches
- ◊ Interchangeable kit replacements available for all models
- ◊ Optional maintenance free, Sealed Wheel Bearings
- ◊ Optional Wheel compounds:
 - Cushothane[®] EZ[™]
 - Cushothane[®] XL[™]



STR Stabilizer Caster[™] The Newest Technology in Stabilizer Casters

STR5400 Series Caster Side Adjustable for 8,000lb Rider Pallet Trucks

Designed as aheavier duty quick and easy adjustable from the side of the truck caster. Kingpin-less heavy duty machined & hardened cast housing with no welds and heavy duty 3/8" side plates for added strength and longevity. Features patented PolyBlock™ dampener technology.



Immediate Availability Designed and manufactured in-house, we stock and service all assemblies and replacement parts

Reliable and Consistent Performance Less height and performance deterioration over time than metal springs

Heavy Duty Steel Construction

Hardened machined cast upper & lower housing with no welds and heavy duty 3/8" side plates

The Easiest/Fastest Height Adjustable Caster Available

Achieve the perfect height using a typical wrench with our linear fine thread adjusting mechanism - without lifting the truck

Longer Wheel Work-Life and Protected in All Environments

By using a larger wheel (4" O.D.) with the toughest polyurethane compound available with Rust-Proof Zinc plated parts and a greasable wheel or axle for corrosive environments

Greater Cornering Stability & Comfort

Patented PolyBlock[™] damper technology reduces oscillation and rocking effect



Standard Features

- Rust Proof Zinc Plating
- Greasable Wheel Axle
- Available for: STR5453, STR5473

◊ String Guard comes standard

- Linear Deflection with a positive stop after 2 inches
- Interchangeable kit replacements available for all models
- Optional maintenance free, Sealed Wheel Bearings
- ◊ Optional Wheel compounds:
 - Cushothane[®]
 - Cushothane[®] XL[™]



STR Caster Kingpin-less Rigid Swivel Caster

STR4100 Series Rigid Caster For Heavy Duty Material Handling Equipment

Designed primarily as a robust rigid caster for heavy duty material handling carts, trucks and rigging equipment, the STR4100 Series excels where others fail. With a solid steel cast housing, no fasteners to break, and hardened steel bearing race, it's aisles ahead of the competition.



Heavy Duty Steel Construction

Solid casting without welds and heavy duty kingpin-less swivel mechanism.

Convenient Greasability

Greasing moving parts is critical to prolonging work-life. With conveniently located grease fittings, basic maintenance is even easier.

Longer Wheel Work-Life from a Large Load Wheel

By using a large 6" OD wheel with the toughest polyurethane compounds available, and a 3" wide cross section provides extreme durability and optimal load capacity.

Consistently Smooth Swivel

Specially designed with a hardened steel bearing race uses rubber O-rings to lock out moisture & debris, and lock in grease.

Sealed Bearings & String Guards

Preventing debris from binding up the load wheels while maintaining internal lubrication.

Zero Fasteners


Factory assembled with no fasteners to eliminate the burden of nut & bolt weaknesses.

Standard Features

- Rust Proof Zinc Plating
- Greasable Wheel Axle
- 8" Standard Height
- Available for: STR4163 & STR4164

◊ String Guard comes standard

- Optional maintenance free, Sealed Wheel Bearings
- ◊ Optional Wheel compounds:
 - Cushothane[®]
 - Cushothane[®] XL[™]



Caster Maintenance Log

| Truck ID / Equipment | Caster Model | Date Checked | Action Required | Action Completed Date | Mechanic/ Inspector |
|-------------------------|-----------------|-----------------|-----------------|-----------------------------|------------------------|
| | | | | | |
| } | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| } | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| <u>}</u> | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| 5 | | | | | |

Superior Tire & Rubber Corp.

40 Scientific Rd. Warren, PA 16365

1.800.289.1456 www.SuperiorTire.com



©2018 Superior Tire & Rubber Corp. All Rights Reserved.